

A coupled HDG-FV method for incompressible flows simulations

Agustina Felipe*, Ruben Sevilla and Oubay Hassan

Zienkiewicz Centre for Computational Engineering, Faculty of Science and Engineering
Swansea University, Bay Campus, SA1 8EN, Swansea, Wales, UK.
e-mail: 1901579@swansea.ac.uk

ABSTRACT

The simulation of steady incompressible flows is nowadays routinely performed using low-order methods such as the finite volume (FV) method [1]. When transient incompressible flows are to be considered, the task of generating a suitable mesh becomes more cumbersome. This is due to the increased difficulty of designing a mesh capable of capturing all the transient flow features. In practice, to balance accuracy and efficiency, the use of mesh adaptivity is often considered. Additionally, when flow features such as vortices are to be propagated over long distances, the excessive dissipation and dispersion errors associated with low-order methods force the use of excessively refined meshes. High-order methods have shown the ability to reduce dissipation and dispersion errors compared to low-order methods. However, it is still difficult to obtain high-quality curvilinear meshes of complex geometric objects and without this technology, the advantages of high-order methods cannot be realised.

This work proposes the combination of low and high-order methods to simulate transient incompressible flows using meshes designed for steady simulations. In the vicinity of complex geometric objects, where the mesh used for steady simulations is fine enough, the FV method is employed. However, where the mesh is not good enough to capture the transient features, the solution is computed using the high-order hybridisable discontinuous Galerkin (HDG) method [2]. Contrary to other coupled methods presented, where a monolithic coupling was proposed, this work develops a strategy to produce a staggered coupling. This ensures that legacy FV codes can be employed, and the solution is enriched only where needed.

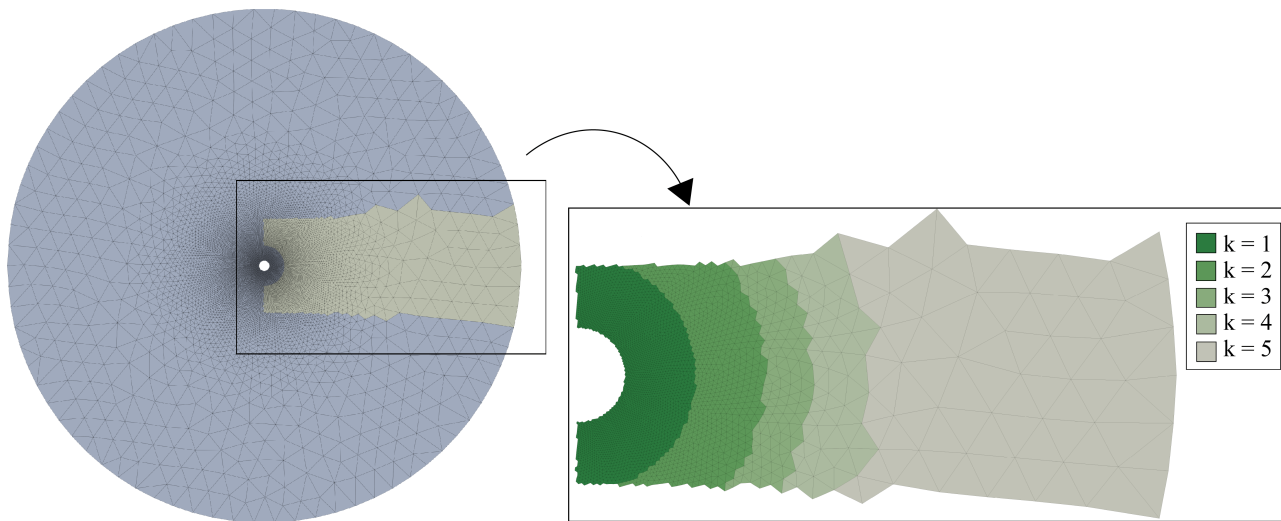


Figure 1: Partition of the domain into the HDG (green) and FV (blue) subdomains.

Figure 1 shows the 3D unstructured mesh used for solving a flow past a cylinder. Elements in blue employ a standard FV strategy, the mesh is good enough to capture the solution, whereas elements

