

# Accurate FIC-FEM formulation for the multidimensional steady-state advection-diffusion-absorption equation\*

Eugenio Oñate<sup>1,2</sup>, Prashanth Nadukandi<sup>1,3</sup>, Juan Miquel<sup>1,2</sup>

<sup>1</sup> *Centre Internacional de Metodes Numerics a l'Enginyeria (CIMNE), Barcelona, Spain*

<sup>2</sup> *Universitat Politècnica de Catalunya (UPC)*

<sup>3</sup> *School of Mathematics, The University of Manchester, Oxford Rd, Manchester, UK*

---

## Abstract

In this paper we present an accurate stabilized FIC-FEM formulation for the multidimensional steady-state advection-diffusion-absorption equation.

The stabilized formulation is based on the Galerkin FEM solution of the governing differential equations derived via the Finite Increment Calculus (FIC) method using two stabilization parameters. The value of the two stabilization parameters ensuring an accurate nodal FEM solution using uniform meshes of linear elements is obtained from the optimal values for the 1D problem.

The accuracy of the new FIC-FEM formulation is demonstrated in the solution of 2D steady-state advection-diffusion-absorption problems for a range of physical parameters and boundary conditions.

*Keywords:* Advection-diffusion-absorption, finite element method, finite increment calculus

---

---

<sup>0</sup>Dedicated to J. Tinsley Oden on its 80th birthday

## 1. Introduction

It is well known that the numerical solution of the advection-diffusion-absorption problem by the standard Galerkin FEM is prone to exhibit *global*, *Gibbs* and *dispersive* oscillations [12, 65, 66]. The solution of the stationary problem by the FEM exhibits spurious global oscillations for the convection-dominated case. The local Gibbs oscillations are exhibited along the characteristic layers for the 2D/3D convection-dominated case. For the absorption-dominated cases Gibbs oscillations may be found near the Dirichlet boundaries and in the regions where the distributed source term is nonregular. The solution of the transient problem may exhibit dispersive oscillations when the initial solution and/or the distributed source term are nonregular.

Control over the global instability has been achieved via the streamline-upwind Petrov–Galerkin (SUPG) [5, 24, 25], Taylor–Galerkin [11], characteristic Galerkin [13, 34], Galerkin least squares (GLS) [26], bubble functions [2, 1, 3], variational multiscale (VMS) [27], characteristic-based split (CBS) [64] and finite increment calculus (also known as finite calculus) (FIC) based methods [39, 41, 42, 50, 51, 54]. A thorough comparison of some of these methods can be found in [8]. Oñate and Manzan [41, 42] showed that many of the above stabilized methods can be recovered using the FIC equations via an appropriate definition of the stabilization parameters. Nevertheless nonregular solutions continue to exhibit the Gibbs and dispersive oscillations.

Several shock-capturing nonlinear Petrov–Galerkin methods were proposed to control the Gibbs oscillations observed across characteristic internal/boundary layers for the convection-diffusion problem [19, 7, 10, 14, 31, 33, 35, 50]. A state of the art review of these and several other shock-capturing methods for the convection-diffusion equations was done in [30]. Reactive terms were not considered in the *Analysis of these methods and how they fail to control the localized oscillations* in the presence of these terms. Exceptions to this are the *consistent approximate upwind* (CAU) method [19], the methods presented in [6] and those that take the CAU method as the starting point [14]. Nevertheless, the expressions for the stabilization parameters therein were never optimized for reactive instability and often the solutions are over-diffusive in these cases.

In the quest to gain reactive stability several methods were built upon the existing frameworks of methods that control global oscillations. Extension of the SUPG method were proposed for the convection–diffusion–reaction problem, viz. the DRD [62] and (SU+C)PG [28] methods. Based on the GLS method, linear stabilized methods were proposed, viz. the GGLS method [16] for the diffusion–reaction problem and the GLSGLS method [20] for the convection-diffusion-production problem. Within the framework of stabilization via bubbles we note the USFEM method [17] for the diffusion–reaction problem, the improved USFEM method [18] and the link cutting bubbles procedure [4] for the convection–diffusion–reaction problem. Based on the VMS method linear stabilized methods were proposed for the convection–diffusion–reaction problem, viz. the ASGS method [9], the SGS-GSGS method [21] and others [22, 23]. Using the FIC equations a nonlinear method based on a single stabilization parameter was proposed for the convection–diffusion–

absorption problem in 1D [51] and higher dimensions [54]. Nodally exact Ritz discretizations of the 1D diffusion-reaction equation by a variational FIC method using a single stabilization parameter were presented in [15].

Control over the dispersive oscillations for the transient convection-diffusion problem via linear Petrov-Galerkin methods were discussed in [29] and using space-time finite elements in [63]. As for the linear methods, optimizing the expressions of the stabilization parameters to attain monotonicity will lead to solutions that are at most first-order accurate.

Generally the homogeneous steady convection-diffusion-reaction problem in 1D has two fundamental solutions. Thus in principle one can use two stabilization parameters for designing linear stabilized methods that are nodally exact in 1D. Following this line several “two-parameter methods” were designed to be nodally exact for the stationary problem in 1D [4, 20, 23].

In [36, 37] we presented a FIC-based nonlinear high-resolution Petrov-Galerkin (HRPG) method for convection-diffusion-absorption problems. The method has two parameters and is capable of reproducing high-resolution numerical solutions for both the stationary and transient regimes.

Following these lines, Oñate et al. [60] presented an accurate FIC-FEM formulation for the 1D steady-state and transient advection-diffusion-absorption equation in the exponential and propagation regimes *using two stabilization parameters*. The FIC-FEM formulation provided excellent results for both regular and irregular meshes.

In this work we extend to the multidimensional steady-state case the 1D FIC-FEM formulation presented in [60]. Due to the particular features of the multidimensional Helmholtz problem, in this work we will only consider the advection-diffusion-absorption situations. The optimal value of

two stabilization parameters ensuring a quasi-exact (nodal) FEM solution using uniform meshes of linear 2-noded elements is obtained as an extension of the analogous expressions for the 1D problem derived in [60]. In the absence of the absorption term the formulation simplifies to the standard one-parameter Petrov-Galerkin approach for the advection-diffusion problem. For the diffusion-absorption case one stabilization parameter is just needed and the diffusion-type stabilization term is identical to that obtained by Felippa and Oñate [15] using a variational FIC approach.

The lay-out of the paper is the following. In the next section we formulate the FIC form of the equations governing steady-state multidimensional convection-diffusion-absorption problem. The finite element discretization using linear elements is presented. Then the optimal stabilization parameters yielding quasi-exact nodally solutions for the sourceless case are obtained. The accuracy of the multidimensional FIC-FEM formulation is verified in the solution of a number of steady-state advection-diffusion-absorption problems in the exponential and propagation regimes using uniform and irregular meshes of 3-noded triangles and 4-noded quadrilateral elements. Accurate solutions are obtained in all cases. Quasi-exact solutions are obtained when regular meshes are used, as expected.

## 2. The multidimensional steady-state advection-diffusion-absorption problem

### 2.1. Governing equations

Transport balance

$$r_s = 0 \quad \text{in } \Omega \quad (1)$$

$$r_s := \rho c \mathbf{v}^T \nabla \phi - \nabla^T \mathbf{D} \nabla \phi + s \phi - Q \quad (2a)$$

where  $\rho$  and  $c$  are the density and the heat ...

For 3D problems,

$$\mathbf{v} = [v_1, v_2, v_3]^T, \quad \mathbf{D} = \begin{bmatrix} k_1 & 0 & 0 \\ 0 & k_2 & 0 \\ 0 & 0 & k_3 \end{bmatrix}, \quad \nabla = \left[ \frac{\partial}{\partial x_1}, \frac{\partial}{\partial x_2}, \frac{\partial}{\partial x_3} \right]^T \quad (2b)$$

In Eqs.(1)–(2b)  $\phi$  is the transported variable (for instance, the temperature in a heat transfer problem),  $u$  is the velocity,  $\rho$ ,  $c$  and  $k$  are the density, the specific flux parameter and the conductivity of the material, respectively,  $s$  is the reaction parameter ( $s > 0$  is the absorption or dissipation parameter and  $s < 0$  is the production parameter). In the following, and unless otherwise specified, we will assume that the problem parameters ( $u, \rho, c, k, s$ ) are constant over the analysis domain.

Boundary conditions

Register for free at <https://www.scipedia.com> to download the version without the watermark

$$\phi - \phi^n = 0 \quad \text{on } \Gamma_\phi \quad (3)$$

$$r_\Gamma = 0 \quad \text{on } \Gamma_q \quad (4)$$

with

$$r_\Gamma := -q_n + q_n^p \quad (5)$$

$$q_n = \mathbf{q}^T \mathbf{n}, \quad \mathbf{q} = \mathbf{v} \phi - \mathbf{D} \nabla \phi \quad (6)$$

where  $\mathbf{n}$  is the unit vector normal to the boundary.

In Eqs.(4)–(6)  $\phi^p$  and  $q^p$  are the prescribed values of the transported variable and the outgoing flux at the Dirichlet and Neumann boundaries  $\Gamma_\phi$  and  $\Gamma_q$ , respectively, with  $\Gamma_\phi \cup \Gamma_q = \Gamma$ ,  $\Gamma$  being the total boundary of the domain

In this work we will consider cases for which  $s \geq 0$  only. This includes the following particular problems:

- (i) Advection-diffusion-absorption ( $|\mathbf{v}| \neq 0, K \neq 0, s > 0$ ).

- (ii) Advection-diffusion ( $|\mathbf{v}| \neq 0, K \neq 0, s = 0$ ).
- (iii) Diffusion-absorption ( $|\mathbf{v}| = 0, K \neq 0, s > 0$ ).
- (iv) Advection-absorption ( $|\mathbf{v}| \neq 0, K = 0, s > 0$ ).

In the above  $K$  is the average diffusion given by  $K = \left[ \frac{1}{n_d} \sum_{i=1}^{n_d} k_i \right]^{1/2}$ , where  $n_d$  is the number of space dimensions (i.e.  $n_d = 2$  for 2D problems).

## 2.2. Finite increment calculus (FIC) expressions

### Transport balance

$$r_s - \frac{1}{2} \mathbf{h}^T \nabla r_s = 0 \quad (7)$$

### Boundary conditions

$$\phi - \phi^p = 0 \quad \text{on } \Gamma_\phi \quad (8a)$$

$$r_\Gamma - \frac{1}{2} h_n r_s = 0 \quad \text{on } \Gamma_q \quad \text{with } h_n = \mathbf{h}^T \mathbf{n} \quad (8b)$$

Eqs.(7) and (8b) are obtained by expressing the balance of fluxes in an arbitrary segment of finite length  $h$  (termed the *characteristic length*) within the problem domain and at the Neumann boundary, respectively. The variations of the transported variable within the balance segment are


approximated by Taylor series expansions retaining one order higher terms than in the infinitesimal theory [39]. The underlined terms in Eqs.(7) and (8) emanate from these series expansions and

they lead naturally to stabilized numerical schemes.

Note that  $r_s \neq 0$  and  $r_\Gamma \neq 0$  in the FIC balance equations (7) and (8). However, as the characteristic length  $h$  tends to zero the FIC differential equations gradually recover the standard infinitesimal form, giving in the limit (for  $h = 0$ )  $r_s = 0$  in  $\Omega$  and  $r_\Gamma = 0$  on  $\Gamma_q$ .

As in all stabilized methods, the stability and accuracy of the numerical solution depends on the values of the stabilization parameter, i.e. of the characteristic length vector  $\mathbf{h}$ . At the discrete level the length of  $\mathbf{h}$  can be related to the a characteristic dimension of the (macroscopic) domain within which the space derivatives are computed. At the discretization level it is usual to express the length of  $\mathbf{h}$  as a proportion of a typical grid dimension (i.e. the element length for 1D FEM problems or a characteristic element dimension for 2D and 3D problems) [39].

The FIC governing equations lead to stabilized numerical schemes using whatever numerical method. It is interesting that many of the standard stabilized FEM can be recovered using the FIC-FEM formulation. The FIC-FEM method has been successfully applied to the finite element solution problems of convection-diffusion [39, 41, 42, 50], diffusion-absorption and Helmholtz [15],

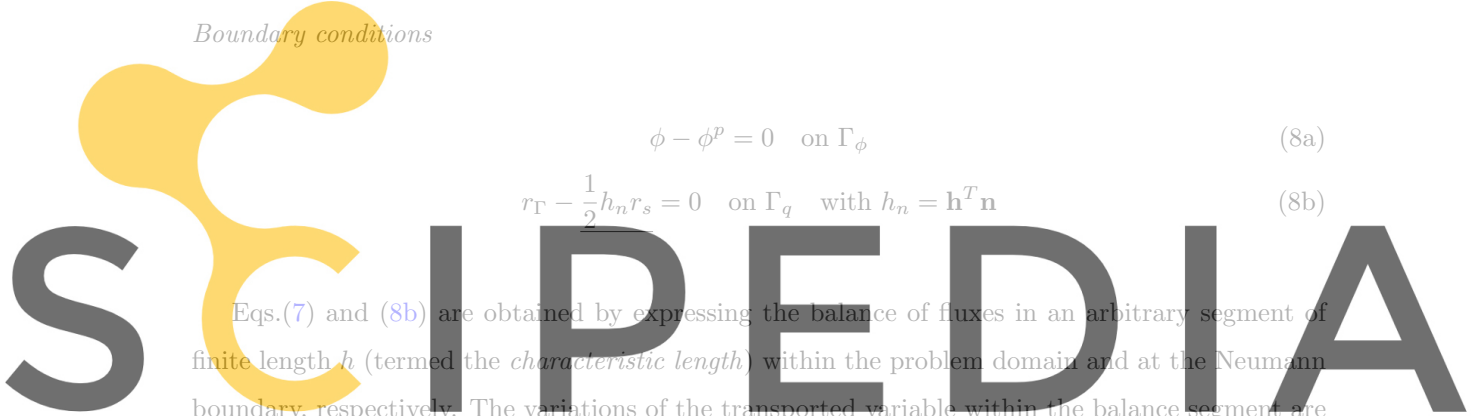

Register for free at <https://www.scipedia.com> to download the version without the watermark

advection-diffusion-absorption [51, 54], advection-diffusion-reaction [60], incompressible fluid flow [52, 53, 55, 57, 59], fluid-structure-interaction [44, 48, 56], particulate flows and standard and incompressible solid mechanics [46, 49, 58]. Applications of the FIC stabilization approach to meshless problems solved using the finite point method are reported in [38, 40, 43, 45].

### 2.3. The 1D advection-diffusion-absorption problem

The FIC-FEM equations for the 1D steady-state advection-reaction-absorption problems are [60]

*Transport balance*

$$r_s - \frac{1}{2}h \frac{dr_s}{dx} = 0 \quad \text{in } \Omega \quad (9)$$

$$r_s := \rho cv \frac{d\phi}{dx} - \frac{d}{dx} \left( k \frac{d\phi}{dx} \right) + s\phi - Q \quad (10)$$

*Boundary conditions*

$$\phi - \phi^p = 0 \quad \text{on } \Gamma_\phi \quad (11)$$

$$r_s + \frac{h}{2}r_s = 0 \quad \text{on } \Gamma_q \quad (12)$$

$$r_\Gamma = \left( -\rho cu\phi + k \frac{d\phi}{dx} \right) n + q^p = 0 \quad (13)$$

when  $M$  defines the sign of the normal direction at the boundary edges.

For simplicity we will assume that  $\Gamma_\phi$  and  $\Gamma_q$  are placed at  $x = 0$  and  $x = l$ , respectively.

Hence,  $n = +1$  at  $x = l$ .

Oñate et al. [60] have proposed the following expression for the characteristic length parameter

$$h = h_v + h_r \quad \text{with } h_v = \alpha_v l^e \quad , \quad h_r = 2\alpha_r \frac{k}{r} \frac{d\phi}{dx} \quad (14)$$

where  $l^e$  is the element length and  $\alpha_v$  and  $\alpha_r$  are stabilization parameters. Indices  $v$  and  $r$  refer to the velocity and reaction contributions to the characteristic length parameter.

Application of the standard Galerkin FEM to the FIC equations (9)-(11) leads to the following system of discretized equations

$$[\mathbf{K} + \mathbf{C} + \mathbf{S}]\boldsymbol{\phi} = \mathbf{f} \quad (15)$$

where vector  $\boldsymbol{\phi} = [\phi_1, \phi_2, \dots, \phi_N]^T$  lists the values of the approximated transported variable at the  $N$  nodes in the mesh,  $\mathbf{K}$  is the diffusion matrix,  $\mathbf{C}$  is the convection matrix,  $\mathbf{S}$  is the radiation

matrix and  $\mathbf{f}$  is the nodal external flux vector. These matrices and vector  $\mathbf{f}$  are assembled from the element contributions given by

$$K_{ij}^e = \int_{l^e} \left[ \frac{dN_i}{dx} \bar{k} \frac{dN_j}{dx} - \frac{dN_i}{dx} \frac{h_v}{2} \frac{d}{dx} \left( k \frac{dN_j}{dx} \right) \right] dx \quad (16a)$$

$$C_{ij}^e = - \int_{l^e} \frac{dN_i}{dx} \rho c \bar{v} N_j dx \quad , \quad S_{ij}^e = \int_{l^e} s N_i N_j dx \quad (16b)$$

$$f_i^e = \int_{l^e} \left[ N_i + \alpha_r \frac{l^e}{2} \frac{dN_i}{dx} \right] Q dx \quad (16c)$$

Note that the second term in  $K_{ij}^e$  vanishes for the linear 2-noded elements.

The expression for the equivalent diffusion  $\bar{k}$  in  $K_{ij}^e$  (Eq.(16a)) is given by

$$\bar{k} = k + k_v + k_r \quad (17)$$

with  $k_v = \alpha_v \frac{\rho c v l^e}{2} = \alpha_v \gamma k$  and  $k_r = \alpha_r k$ , where  $\gamma = \frac{v l^e}{2k}$  is the element Peclet number.

On the other hand, the equivalent velocity  $\bar{v}$  in matrix  $\mathbf{C}$  (Eq.(16b)) is given by

$$\bar{v} = \left( 1 - \frac{\alpha_v}{2} \sigma \right) v \quad (18)$$

where  $\sigma = \frac{w}{2\gamma} = \frac{s l^e}{\rho c v}$  is the Damköhler number.

The above expressions show that the definition of the characteristic length parameter of Eq.(14) leads to a linear problem with an equivalent diffusion  $\bar{k}$  and an equivalent velocity  $\bar{v}$ .

In [60] it is shown that *exact nodal solutions* for a uniform mesh of 2-noded elements are found using the following expressions for the stabilization parameters  $\alpha_v$  and  $\alpha_r$ :

Register for free at <https://www.scipedia.com> to download the version without the watermark

$$\alpha_v = \frac{\sigma}{\sigma} \left( 1 - \frac{w l^e}{\xi - 1} \right) \quad (19a)$$

$$\alpha_r = \gamma \left[ \frac{\sigma}{3} \left( \frac{\xi + 2}{\xi - 1} \right) - \alpha_v \right] - 1 \quad (19b)$$

with  $\xi = \frac{\cosh \lambda}{\cosh \gamma}$  with  $\lambda = (\gamma^2 + w)^{1/2}$ .

Examples of the accuracy of the FIC-FEM formulation for 1D advection-diffusion-reaction problems (including Hemholtz problems) using uniform and non-uniform meshes of 2-noded elements are given in [60]. Exact nodal solution for uniform meshes are obtained in all cases as expected.

**Remark 1.** Equivalent expressions of the “exact” stabilization parameters  $\alpha_v$  and  $\alpha_r$  in terms of  $\gamma$  and  $w$  are given in [60]. Note that  $\alpha_r$  is termed  $\alpha_g$  in [60]. Also in the expression of  $\alpha_r$  in Eq.(19b) of [60] the -1 term is missing. The correct expression is given in Eq.(19b).

The above FIC-FEM formulation for the steady-state 1D advection-diffusion-reaction problem will be extended for solving the multidimensional advection-diffusion-absorption problem as presented next.

### 3. FIC-FEM formulation for the multidimensional steady-state advection-diffusion-absorption problem

#### 3.1. Definition of the characteristic length vector

The characteristic length vector  $\mathbf{h}$  is designed so that the expression for all matrices and vectors reduce to those given for the 1D case in the previous section.

With this objective in mind the following expression for the characteristic length vector has been chosen

$$\mathbf{h} = \mathbf{h}_v + \mathbf{h}_r + \mathbf{h}_{sc} \quad (20)$$

with  $\mathbf{h}_v$  is a length vector along the velocity direction defined as

$$\mathbf{h}_v = \alpha_v l_v \frac{\mathbf{v}}{|\mathbf{v}|} \quad (21)$$

$\mathbf{h}_r$  is a length vector induced by the radiation (absorption) effects,

$$\mathbf{h}_r = \mathbf{H}_r \nabla \phi \quad \text{with} \quad \mathbf{H}_r = \frac{2}{r_s} [\mathbf{D}_s + \alpha_r D \hat{\mathbf{v}} \hat{\mathbf{v}}^T] \quad (22a)$$

where  $\hat{\mathbf{v}}$  is a unit velocity vector (i.e.  $\hat{\mathbf{v}} = \frac{\mathbf{v}}{|\mathbf{v}|}$ ) and

$$D = \hat{\mathbf{v}}^T \mathbf{D} \hat{\mathbf{v}} \quad (22b)$$

Matrix  $\mathbf{D}_s$  is defined for different element types as follows.

3-noded triangles and 4-noded tetrahedra:

$$\mathbf{D}_s = \frac{5}{(n+1)} \sum_{i=1}^n \mathbf{l}_i \mathbf{l}_i^T \quad (23)$$

where  $\mathbf{l}_i$  is the vector joining the baricenter of the element and the  $i$ th node and  $n$  is the number of nodes of the element.

Any other element:  $\mathbf{D}_s = [0]$

Finally, in Eq.(20)  $\mathbf{h}_{sc}$  is a shock-capturing length vector in the direction of the gradient of the solution. This vector accounts for the Gibbs oscillations across characteristic internal/boundary layers for convection-diffusion problems. It is defined as

$$\mathbf{h}_{sc} = h_{sc} \widehat{\nabla} \phi \quad (24a)$$

where  $\widehat{\nabla} \phi = \frac{\nabla \phi}{|\nabla \phi|}$  is the unit gradient vector, and

$$h_{sc} = (1 - \beta^2) \left[ l_{sc} \text{sgn}(r_s) - \frac{2|\nabla \phi|}{r_s} (\mathbf{D} + \mathbf{D}_s) : (\mathbf{I} - \hat{\mathbf{v}} \hat{\mathbf{v}}^T) \right] \quad (24b)$$

In (24b)  $\beta$  is a parameter that depends on the angle  $\theta$  between the velocity vector and the gradient vector. For 3-noded triangular elements it is defined as

$$\beta = \begin{cases} 1 & \text{if } \theta < \theta_c \\ \hat{\mathbf{v}}^T \widehat{\nabla} \phi & \text{if } \theta \geq \theta_c \end{cases} \quad (24c)$$



where  $\theta_c$  is a critical angle. In our work we have taken  $\theta_c = 20^\circ$ .

The parameter  $\beta$  controls the amount of shock-capturing nonlinear diffusion active at any point of the domain. When the gradient vector is parallel to the velocity vector then  $\beta = 1$ ,  $h_{sc}$  vanishes and the linear stabilization terms suffice to diminish spurious numerical oscillations about the layers. In this case the solution is essentially 1D and the linear stabilization terms are a direct extension to 2D of the optimal 1D terms. The expression  $\beta = \widehat{\mathbf{v}} \cdot \widehat{\nabla\phi}$  takes a unit value in the aforesaid case and becomes zero when the layer gradient is orthogonal to the velocity. Multiplying the shock-capturing term with  $1 - \beta^2$  gradually increases its magnitude from zero, when the gradient vector is aligned to velocity vector, to a maximum value when the layer gradient is orthogonal to the velocity. However, we have found this model for  $\beta$  not effective near domain corners and in the vicinity of discontinuous boundary data where the layer gradient may have a spurious direction. For quadrilateral meshes we have found the following expression for  $\beta$  to be more effective

$$\beta = \left( 1 - \frac{\text{std}(\widehat{\mathbf{v}} \cdot \widehat{\nabla\phi})}{\max(\text{std}(\widehat{\mathbf{v}} \cdot \widehat{\nabla\phi}))} \right) (\widehat{\mathbf{v}} \cdot \widehat{\nabla\phi}) \quad (25)$$

where, the  $\text{std}()$  operator returns the standard deviation of its argument evaluated at the Gauss points and the  $\max()$  operator returns the maximum value of its argument over all elements. The rationale for this model is that Q1 elements which have spurious layer gradients will also have a larger standard deviation in the values of  $\widehat{\mathbf{v}} \cdot \widehat{\nabla\phi}$ . The higher the standard deviation the closer is  $\beta$  to zero and the higher is the magnitude of the shock-capturing stabilization term. For P1 elements  $\widehat{\mathbf{v}} \cdot \widehat{\nabla\phi}$  is constant within an element and hence the standard deviation is zero. So Eq. (25) reduces to  $\beta = \widehat{\mathbf{v}} \cdot \widehat{\nabla\phi}$  and results in no additional benefits as obtained for the Q1 elements.

Register for free at <https://www.scipedia.com> to download the version without the watermark

Another possibility is to take the standard deviation of  $\widehat{\mathbf{v}} \cdot \widehat{\nabla\phi}$  in a patch of elements surrounding the chosen element. However, it adversely affected the convergence of the iterations resulting from the linearisation of the shock-capturing terms. Hence for P1 elements the model  $\beta = \widehat{\mathbf{v}} \cdot \widehat{\nabla\phi}$  was chosen.

**Remark.** Matrix  $\mathbf{D}_s$  of Eq.(23) has the following property

$$\mathbf{K}_s^e = \int_{\Omega^e} (\nabla N_i)^T \mathbf{D}_s \nabla N_j d\Omega = (\mathbf{M}_L^e - \mathbf{M}_C^e)$$

where

$$\mathbf{M}_{C_{ij}}^e = s \int_{\Omega^e} N_i N_j d\Omega$$

and  $\mathbf{M}_L^e$  is the lumped form of  $\mathbf{M}_C^e$ . We point out that  $\mathbf{K}_s^e$  is the limit stabilizing diffusion matrix for the diffusion-radiation problem for the case of zero diffusion. The diffusion introduced by  $\mathbf{D}_s$  takes care of the instabilities induced by the irregularity of the triangular mesh near boundaries that develop parabolic layers.

### 3.2. Definition of the stabilization parameters

The stabilization parameters  $\alpha_v$  and  $\alpha_r$  in Eqs.(21) and (22a) are given by

$$\alpha_v = \begin{cases} \frac{2}{\sigma_v} \left( 1 - \frac{\sigma_v \tanh \gamma_v}{\xi - 1} \right) & , \quad \sigma \geq 2^{-12} \\ \frac{\sigma_v}{3} + \bar{\alpha}_v \left( 1 - \frac{\sigma_v}{\gamma_v} \right) & , \quad \sigma < 2^{-12} \end{cases} \quad (26)$$

with

$$\bar{\alpha}_v = \coth \gamma_v - \frac{1}{\gamma_v} \quad (27)$$

and

$$\alpha_r = \gamma_v \left[ \frac{\sigma_v}{\varphi} \left( \frac{\xi_v - 1 + \varphi}{\xi_v - 1} \right) - \alpha_v \right] - 1 - \frac{1}{D} \hat{\mathbf{v}}^T \mathbf{D}_s \hat{\mathbf{v}} \quad (28)$$

In the above expressions

$$\begin{aligned} \xi_v &= \frac{\cosh \lambda_v}{\cosh \gamma_v} \quad \text{with} \quad \lambda_v = (\gamma_v^2 + w_v^2)^{1/2} \\ \gamma_v &= \frac{|\mathbf{v}| l_v}{2D} \quad , \quad w_v = \frac{s(l_v)^2}{D} \quad , \quad \sigma_v = \frac{s l_v}{|\mathbf{v}|} = \frac{w_v}{2\gamma_v} \end{aligned} \quad (29)$$

The index  $v$  in  $\gamma$ ,  $w$  and  $\sigma$  is chosen to distinguish these expressions from their 1D counter parts [60].

In Eq.(28)  $\varphi$  is a constant such that  $2 \leq \varphi \leq 3$ . The “exact” expression of  $\alpha_r$  for 1D problems requires choosing  $\varphi = 3$  (see Eq.(19b)). In our computations for 2D and 3D problems we have obtained good results using  $\varphi = 2$ .

For the definition of the lengths  $l_v$  and  $l_{sc}$  we have chosen

$$l_v = l_{sc} = \sqrt{2\Omega^e}$$

Register for free at <https://www.scipedia.com> to download the version without the watermark

where  $\Omega^e$  is the element area.

**Remark.** The regularised expression of  $\alpha_v$  in Eq.(26) ensures a good numerical behavior for a precision of up to 11 digits in the exact value of  $\alpha_v$ .

#### Advection-diffusion problems ( $s = 0$ )

The stabilization parameters  $\alpha_v$  and  $\alpha_r$  for a zero reaction term are obtained as

$$\begin{aligned} \lim_{w \rightarrow 0} \alpha_v(\gamma_v, w) &= \alpha_v(\gamma_v) = \coth \gamma_v - \frac{1}{\gamma_v} \\ \lim_{w \rightarrow 0} \alpha_r(\gamma_r, w) &= \alpha_r(\gamma) = 0 \end{aligned} \quad (30)$$

#### Diffusion-absorption problems ( $|\mathbf{v}| = 0$ )

The stabilization parameters for a diffusion-absorption term are

$$\lim_{\gamma \rightarrow 0} \gamma_v(\gamma_v, w) = \alpha_v(w) = 0 \quad (31a)$$

$$\lim_{\gamma \rightarrow 0} \gamma_r(\gamma_r, w) = \alpha_r(w) = \frac{w}{4 \sinh^2 \left( \frac{\sqrt{w}}{2} \right)} + \frac{w}{6} - 1 = \bar{\alpha}_g(w)w \quad (31b)$$

with

$$\bar{\alpha}_g(w) = \frac{w}{4 \sinh^2\left(\frac{\sqrt{w}}{2}\right)} + \frac{1}{6} - \frac{1}{w} \quad (32)$$

It can be shown that

$$\lim_{w \rightarrow 0} \bar{\alpha}_r(w) = \frac{1}{12} \quad , \quad \lim_{w \rightarrow 0} \alpha_r(w) = \frac{1}{6} \quad (33)$$

The expression of  $\bar{\alpha}_r$  for the diffusion limit of Eq.(31b) was derived by Felippa and Oñate [15] using a variational FIC formulation. This expression is identical to that obtained in [60] for the 1D problem [].

### Advection-absorption problems ( $|K| = 0$ )

$$\lim_{\gamma \rightarrow \infty} \gamma_v(\gamma, w) = 1 \quad , \quad \lim_{\gamma \rightarrow \infty} \alpha_r(w) = \alpha_r(w) d = \frac{sl_v^2}{6} \quad (34)$$

For  $|K| = 0$  then  $\gamma \rightarrow \infty$ . In this case it is more appropriate to define  $\hat{w} = wD = sl_v^2$ . The stabilization parameters for this case are

$$\lim_{\gamma \rightarrow \infty} \alpha_v(\gamma, \hat{w}) = 1 \quad , \quad \lim_{\gamma \rightarrow \infty} \alpha_r(\gamma, \hat{w}) = \alpha_v(\hat{w}) = \frac{\hat{w}}{6} \quad (35)$$

#### 3.3. Finite element discretization

The weighted residual form of the FIC governing equations (7) and (8) is written as

$$\int_{\Omega} W(r_s - \frac{1}{2} \mathbf{h}^T \nabla r_s) d\Omega + \int_{\Gamma_q} W(-q_n + q_n^p - \frac{1}{2} h_n r_s) d\Gamma = 0 \quad (36)$$

where  $W$  are weighting functions.

Integrating by parts the FIC term in the first integral of (36) gives

$$\int_{\Omega} \left( W r_s + \frac{1}{2} (\nabla^T W) \mathbf{h} r_s \right) d\Omega - \int_{\Gamma_q} W(-q_n + q_n^p) d\Gamma = 0 \quad (37)$$

Note that the FIC term has vanished from the boundary integral, as it usual in the FIC-FEM approach [39, 47].

Let us substitute the expression for the characteristic vector  $\mathbf{h}$  of Eq.(20) into Eq.(37) this gives

$$\int_{\Omega} \left[ W r_s + \frac{1}{2} (\nabla^T W) \left( \alpha_v l_v \hat{\mathbf{v}} + \mathbf{H}_r \nabla \phi + h_{sc} \frac{\nabla \phi}{|\nabla \phi|} \right) \right] r_s d\Omega + \int_{\Gamma_q} W(-q_n + q_n^p) d\Gamma = 0 \quad (38)$$

The final step is the integration by parts of the advective and diffusive terms in the expression of  $r_s$  in the first term of the first integral in Eq.(38). This gives, after grouping some terms, the following expression for the weak variational form of the FIC governing equations

$$\begin{aligned} & \int_{\Omega} \left[ -(\nabla^T W) \bar{\mathbf{v}} \phi + (\nabla^T W) \mathbf{D}_T \nabla \phi + W \phi \right] d\Omega + \int_{\Omega} (\nabla^T W) \mathbf{h} \\ & \left[ -\nabla^T (\mathbf{D} \nabla \phi) - Q \right] d\Omega = - \int_{\Omega} W Q d\Omega + \int_{\Gamma_q} W q_n^p d\Gamma = 0 \end{aligned} \quad (39)$$

where the equivalent velocity  $\bar{\mathbf{v}}$  is given by

$$\bar{\mathbf{v}} = \mathbf{v} + \frac{s}{2} \mathbf{h}_v \quad (40)$$

The expression of the total diffusivity matrix  $\mathbf{D}_T$  is

$$\boxed{\mathbf{D}_T = \mathbf{D} + \alpha_v \mathbf{D}_v + \mathbf{D}_s + \alpha_r D \hat{\mathbf{v}} \hat{\mathbf{v}}^T + \mathbf{D}_{sc} \mathbf{I}} \quad (41)$$

where  $\mathbf{D}$  and  $\mathbf{D}_s$  are defined in Eqs.(2b) and (23), respectively,  $\mathbf{I}$  is the unit matrix and

$$\mathbf{D}_v = \frac{l_v}{2} \hat{\mathbf{v}} \hat{\mathbf{v}}^T \quad (42)$$

$$\mathbf{D}_{sc} = \left( \frac{1}{2} l_{sc} \frac{|r_s|}{|\nabla \phi|} - (\mathbf{D} + \mathbf{D}_s) : (\mathbf{I} - \hat{\mathbf{v}} \hat{\mathbf{v}}^T) \right) (1 - \beta^2) \quad (43)$$

We interpolate the transported variable  $\phi$  in the standard FEM fashion over a mesh of elements with  $n$  nodes as

$$\phi \simeq \hat{\phi} = \sum_{i=1}^n N_i \phi_i \quad (44)$$

where  $N_i$  are the space shape functions and  $\phi_i$  the nodal variables.

Introducing Eq.(44) into (39) and using a Galerkin approach ( $W_i = N_i$ ) gives the final system of discretized equations as

$$[\mathbf{K} + \mathbf{C} + \mathbf{S}] \boldsymbol{\phi} = \mathbf{f} \quad (45)$$

where  $\boldsymbol{\phi} = [\phi_1, \phi_2, \dots, \phi_N]^T$  is the vector of nodal unknowns, with  $N$  being total number of elements in the mesh.

The rest of matrices and vector  $\mathbf{f}$  in Eq.(45) are obtained in the standard FEM fashion by assembling the element contribution given by

$$\mathbf{K}_{ij}^e = \int_{\Omega^e} (\nabla^T N_i) \mathbf{D}_T \nabla N_j d\Omega - \int_{\Omega^e} \frac{1}{2} (\nabla^T N_i) \mathbf{h} \nabla^T (\mathbf{D} \nabla N_j) d\Omega \quad (46)$$

$$\mathbf{C}_{ij}^e = - \int_{\Omega^e} (\nabla^T N_i) \bar{\mathbf{v}} N_j d\Omega \quad (47)$$

$$\mathbf{S}_{ij}^e = \int_{\Omega^e} s N_i N_j d\Omega \quad (48)$$

$$\mathbf{f}_i^e = \int_{\Omega^e} \left( N_i + \frac{1}{2} (\nabla^T N_i) \mathbf{h} \right) Q d\Omega - \oint_{\Gamma_q^e} N_i q d\Gamma \quad (49)$$

Note that the second integral in Eq.(46) vanishes for linear finite element approximations.

#### 3.4. Particularization of the multidimensional formulation to the 1D case

The following simplifications in the FIC-FEM approach presented in Section 3.3 apply for the 1D case

$$\mathbf{v} = \{v\} \quad , \quad \hat{\mathbf{v}} = \{1\} \quad , \quad \mathbf{D} = \{k\} \quad , \quad \mathbf{D}_s = \{0\} \quad , \quad \mathbf{h} = \{h\} \quad , \quad \mathbf{h}_{sc} = \{0\} \quad (50)$$

Taking into account Eq.(50), the expression for the characteristic length of Eq.(20) simplifies to the form of Eq.(14), i.e.

$$h = h_v + h_r \quad (51)$$

with  $h_v = \alpha_v l^e$  and  $h_r = 2\alpha_r \frac{k}{r_s} \frac{d\phi}{dx}$ .


The expression of the stabilization parameter  $\alpha_v$  of Eq.(26) coincides precisely with that given in Eq.(19a) simply noting that  $\gamma_v = \gamma = \frac{vl^e}{2k}$  and  $w_v = w = \frac{s(l^e)^2}{k}$ .

On the other hand, the expression for  $\alpha_r$  is deduced from Eq.(28) making  $\varphi = 3$ ,  $\gamma_v = \gamma$  and  $\mathbf{D}_s = \{0\}$ . This gives

$$\alpha_r = \gamma \left[ \frac{\sigma}{3} \left( \frac{\xi + 2}{\xi - 1} \right) - \alpha_v \right] - 1 \quad (52)$$

which coincides with the 1D expression (Eq.(19b)). As mentioned earlier, both 1D expressions of  $\alpha_v$  and  $\alpha_r$  lead to exact nodal solutions for uniform meshes of 2-noded linear elements [60].

#### 4. Examples

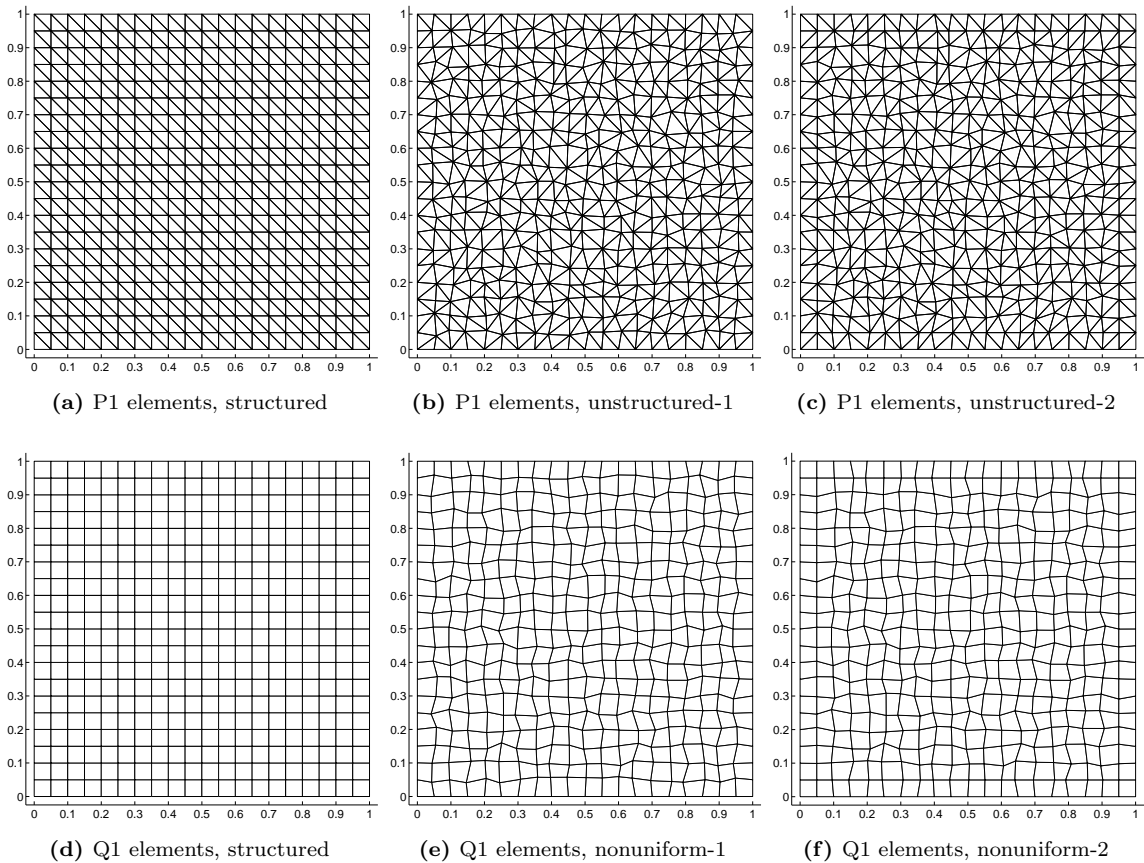

**Figure 1:** Simplicial (P1 elements) and quadrilateral (Q1 elements) meshes considered in the numerical examples. The nodes adjacent to the domain boundary in 1c and 1f are perturbed only in the direction parallel to the boundary.

##### 4.1. Examples

In this section we present the solutions obtained by the proposed FIC-FEM method for some stationary benchmark examples in 2D. The domain is  $(x, y) = [0, 1] \times [0, 1]$ . Each example is solved


using the six different meshes shown in Figure 1. The simplicial meshes consist of  $2 \times 20 \times 20$  P1 finite elements and the quadrilateral meshes consist of  $20 \times 20$  Q1 finite elements. The mesh node positions in Figures 1b, 1c, 1e and 1f are obtained by randomly perturbing uniformly spaced nodes. The nodes adjacent to the domain boundary in Figures 1c and 1f are perturbed only in the direction parallel to the boundary. The simplicial meshes in Figures 1b and 1c are obtained by Delaunay tessellation. These meshes are called *unstructured* as every interior node has a distinct mesh topology in its neighbourhood. The meshes in Figures 1e and 1f are obtained by adopting the connectivity of the uniform mesh in Figure 1d. In these meshes there are always four elements in the patch surrounding any interior node. As only the shapes of the elements vary inside a patch, these meshes are better denoted as *nonuniform*.

The solutions to the numerical examples are presented as surface plots whose view is described as  $(\theta^\circ, \psi^\circ)$ , where  $\theta^\circ$  is the azimuthal angle with respect to the negative y-axis and  $\psi^\circ$  is the elevation angle from the x-y plane.

**Example 1.** The problem data is:  $\mathbf{v} = [5 \cdot 10^6, -9 \cdot 10^6]^\text{T}$ ,  $k_1 = 1$ ,  $k_2 = 1$ ,  $s = 0$  and  $Q = 0$ . The boundary conditions are:  $\phi = 1$  on  $(x = 0, y > 0.7) \cup (x < 1, y = 1)$ ,  $\phi = 0.5$  at  $(x = 0, y = 0.7)$  and  $\phi = 0$  on the rest of the boundary. This problem was first introduced in [5]. The solution develops an exponential boundary layer at the outflow boundary and an internal characteristic layer (parabolic) which is skewed to the mesh and boundary. Both layers are subgrid phenomena for the considered mesh resolution. The FIC-FEM solutions are shown in Figure 2 and are viewed at  $(20^\circ, 20^\circ)$ . Note that both the exponential and characteristic layers are reproduced in the FIC-FEM solution without spurious oscillations about the layers. Clearly, the best solution are obtained for the structured meshes.

**Example 2.** This is a uniform advection problem with a constant source term introduced in [32]. The problem data is:  $\mathbf{v} = [1, 0]^\text{T}$ ,  $k_1 = 10^{-8}$ ,  $k_2 = 10^{-8}$ ,  $s = 0$  and  $Q = 1$ . The homogeneous boundary condition  $\phi = 0$  is imposed everywhere. The solution develops an exponential layer at the outflow boundary  $x = 1$  and parabolic layers at the boundaries  $y = 0$  and  $y = 1$ . Both layers are subgrid phenomena for the considered mesh resolution. The FIC-FEM solutions are shown in Figure 3 and are viewed at  $(-45^\circ, 20^\circ)$ . Again the best solutions are obtained for the structural meshes.

**Example 3.** This is a uniform advection problem with a discontinuous source term introduced in [35]. The problem data is:  $\mathbf{v} = [1, 0]^\text{T}$ ,  $k_1 = 10^{-8}$ ,  $k_2 = 10^{-8}$ ,  $s = 0$ ,  $Q(x < 0.5) = 1$  and  $Q(x > 0.5) = -1$ . The homogeneous boundary condition  $\phi = 0$  is imposed everywhere. Visually the solution looks like a prism of height 0.5 with the kink positioned at  $x = 0.5$ . However, the solution develops parabolic layers at the boundaries  $y = 0$  and  $y = 1$ . Further, it also develops exponential layers near the corners of the boundary  $x = 1$  where the parabolic layers meet. Both layers are subgrid phenomena for the considered mesh resolution. The Galerkin FEM will yield a solution which exhibits localized Gibbs oscillations across the parabolic layers and spurious global

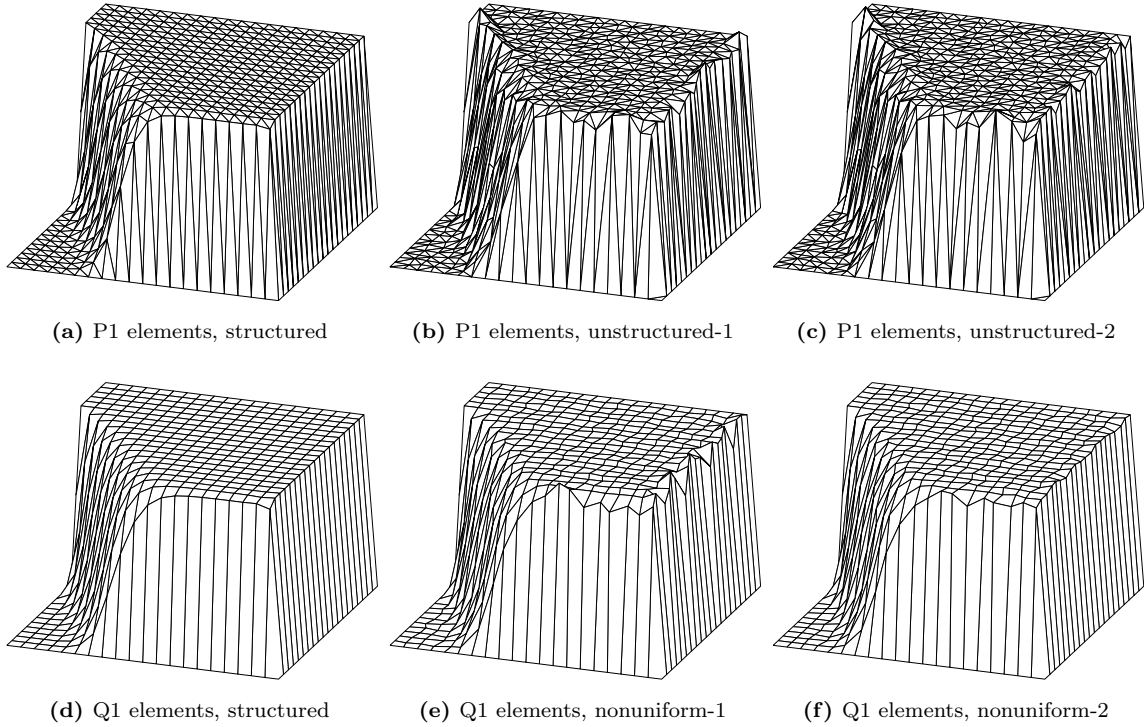


**Figure 2:** FIC-FEM solution to Example 1.  $\mathbf{v} = [5 \cdot 10^6, -9 \cdot 10^6]^T$ ,  $k_1 = 1$ ,  $k_2 = 1$ ,  $s = 0$ ,  $Q = 0$  and viewed at  $(20^\circ, 20^\circ)$ .

oscillations along the parabolic layers. The presence of the exponential layer in the neighbourhood of the corners (although invisible to the naked eye) is the cause of the spurious global oscillations. The FIC-FEM solutions are shown in Figure 4 and are viewed at  $(-10^\circ, 20^\circ)$ . This problem also emphasizes the necessity of a consistent stabilization method: the position and height of the kink found in the solution at  $x = 0.5$  will be incorrectly predicted otherwise. Note the higher accuracy obtained for the structural meshes.

**Example 4.** This is a plain diffusion–absorption problem. The problem data is:  $\mathbf{v} = \mathbf{0}$ ,  $k_1 = 10^{-4}$ ,  $k_2 = 10^{-8}$ ,  $s = 1$  and  $Q = 1$ . The homogeneous boundary condition  $\phi = 0$  is imposed everywhere. As there is no advection velocity, the solution only develops parabolic layers at the boundary. Due to a larger diffusion coefficient along the x-axis, the layers at  $x = 0$  and  $x = 1$  are resolved by the mesh. The layers at  $y = 0$  and  $y = 1$  are subgrid phenomena for the considered mesh resolution. The FIC-FEM solutions are shown in Figure 5 and are viewed at  $(-45^\circ, 20^\circ)$ .

**Example 5.** This is a convection–diffusion–absorption problem and is a multidimensional modification of the 1D problem studied earlier in [36, 51]. The problem data is:  $\mathbf{v} = [10^{-2}, 0]^T$ ,  $k_1 = 10^{-4}$ ,  $k_2 = 10^{-4}$ ,  $s = 4.8$  and  $Q = 0$ . The boundary conditions are:  $\phi = 1.0$  on  $(x = 0, y) \cup (x, y = 0)$ ,  $\phi = (3/8)$  on the rest of the boundary. The solution develops a weak exponential layer at the boundary  $x = 1$  and parabolic layers at the remaining boundaries. The distinctive feature of this problem is that Gibbs oscillations found at the upwind boundary  $x = 0$  in the



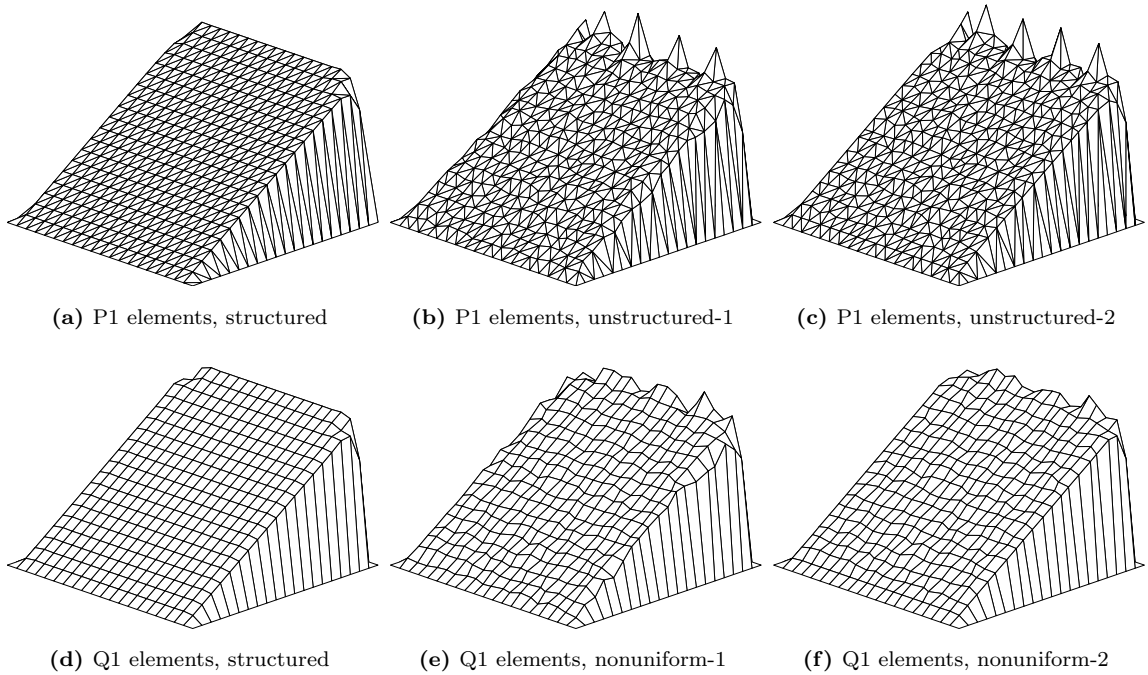


**Figure 3:** FIC-FEM solution to Example 2.  $\mathbf{v} = [1, 0]^T$ ,  $k_1 = 10^{-8}$ ,  $k_2 = 10^{-8}$ ,  $s = 0$ ,  $Q = 1$  and viewed at  $(-45^\circ, 20^\circ)$ .

solution of Galerkin FEM were found to be enhanced (instead of diminished; cf. [36, Section 5.7.1], [37]) in the solutions obtained using the SUPG method [5], the ASGS method [61] and the CAU method [19]. In the latter methods, the expression multiplying the reaction coefficient in the stabilization terms introduces a negative advection effect which causes this abnormal behaviour. The FIC-FEM solutions presented in [51, 37] and the solution of the SGS-GSGS method [23] successfully control the numerical oscillations for this problem. The solutions obtained by the proposed FIC-FEM method viewed at  $(120^\circ, 20^\circ)$  are shown in Figure 6. Stabilized and accurate results are obtained in all cases.

**Example 6.** This problem is similar to the one considered in Example 5 except for the following changes. The magnitude of the advection velocity is increased to  $\mathbf{v} = [1, 0]^T$  and of the diffusion coefficients are reduced to  $k_1 = 10^{-8}$ ,  $k_2 = 10^{-8}$ . The increased advection strengthens the exponential layer at  $x = 1$  and smears the parabolic layer at  $x = 0$  by sweeping the imposed boundary condition into the domain. The reduced diffusion strengthens the parabolic layers at  $y = 0$  and  $y = 1$ . Both layers are subgrid phenomena for the considered mesh resolution. The FIC-FEM solutions viewed at  $(120^\circ, 20^\circ)$  are shown in Figure 7. Solutions are again stable and accurate. Once more the best results are obtained using structured meshes.



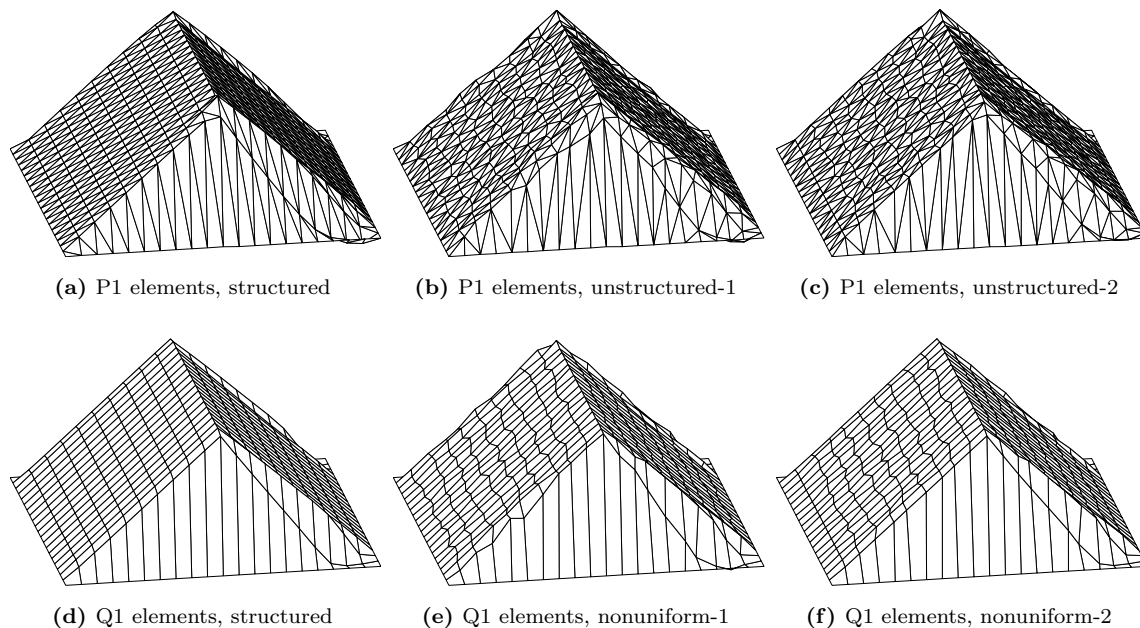

**Figure 4:** The FIC-FEM solution to Example 3.  $\mathbf{v} = [1, 0]^T$ ,  $k_1 = 10^{-8}$ ,  $k_2 = 10^{-8}$ ,  $s = 0$ ,  $Q(x < 0.5) = 1$ ,  $Q(x > 0.5) = -1$  and viewed at  $(-10^\circ, 20^\circ)$ .

## 5. Concluding remarks


The two-parameters stabilized FIC-FEM formulation presented has proven to give accurate results for a range of 2D steady-state advection-diffusion-absorption problems. The extension of the formulation to transient problems is possible follows the ideas presented in [60]. This extension will be reported in a subsequent work.

## Acknowledgements

This research was partially funded by the ICEBREAKER project of the European Research Council. Support for this work was also provided from the Office for Naval Research Global (ONRG) of the US Navy through the NICE-SHIP project. We also acknowledge the financial support of the CERCA programme of the Generalitat de Catalunya.


## References

- [1] Baiocchi C, Brezzi F, Franca LP. Virtual bubbles and the GaLS. *Computer Methods in Applied Mechanics and Engineering* 1993; **105**:125–141.
- [2] Brezzi F, Bristeau MO, Franca LP, Mallet M, Rogé G. A relationship between stabilized finite element methods and the Galerkin method with bubble functions. *Computer Methods in Applied Mechanics and Engineering* 1992; **96**:117–129.

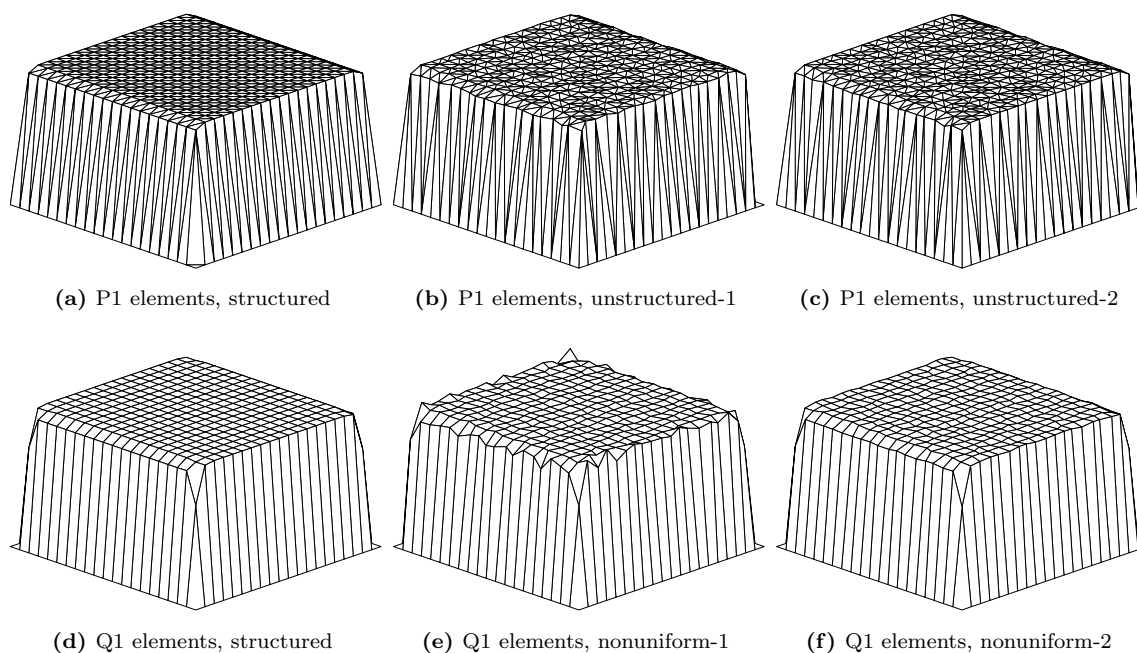


**Figure 5:** The FIC-FEM solution to Example 4.  $\mathbf{v} = \mathbf{0}$ ,  $k_1 = 10^{-4}$ ,  $k_2 = 10^{-8}$ ,  $s = 1$ ,  $Q = 1$  and viewed at  $(-45^\circ, 20^\circ)$ .

- [3] Brezzi F, Russo A. Choosing bubbles for advection-diffusion problems. *Mathematical Models and Methods in Applied Sciences* 1994; **4**:571–587.
- [4] Brezzi F, Hauke G, Marini LD, Sangalli G. Link-cutting bubbles for the stabilization of convection–diffusion–reaction problems. *Mathematical Models and Methods in Applied Sciences* 2003; **13**(3):445–461.
- [5] Brooks AN, Hughes TJR. Streamline Upwind/Petrov–Galerkin formulations for the convective dominated flows with particular emphasis on the incompressible Navier–Stokes equations. *Computer Methods in Applied Mechanics and Engineering* 1982; **32** (1–3):199–259.
- [6] Burman E, Ern A. Nonlinear diffusion and discrete maximum principle for stabilized Galerkin approximations of the convection–diffusion–reaction equation,” *Computer Methods in Applied Mechanics and Engineering* 2002, 191:3833–3855.
- [7] Codina R. A discontinuity-capturing crosswind-dissipation for the finite element solution of the convection-diffusion equation,” *Computer Methods in Applied Mechanics and Engineering* 1993, 110:325–342.
- [8] Codina R. Comparison of some finite element methods for solving the diffusion-convection-reaction equation, *Computer Methods in Applied Mechanics and Engineering* 1998, 156:185–210.

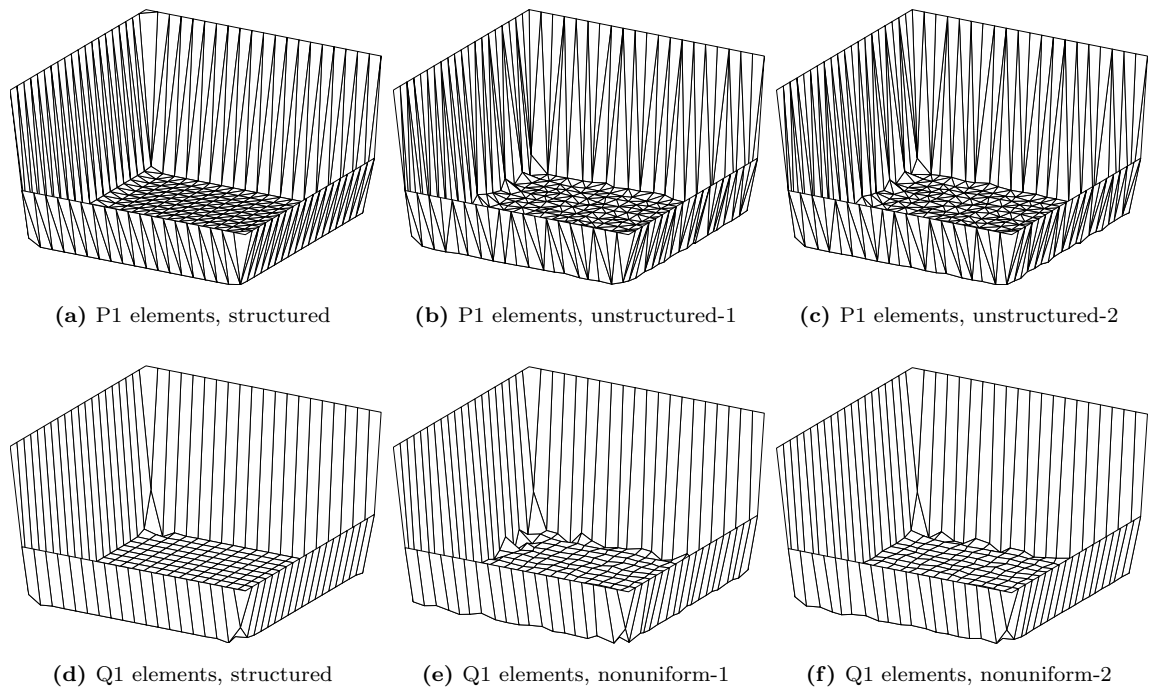

**Figure 6:** The FIC-FEM solution to Example 5.  $\mathbf{v} = [10^{-2}, 0]^T$ ,  $k_1 = 10^{-4}$ ,  $k_2 = 10^{-4}$ ,  $s = 4.8$ ,  $Q = 0$  and viewed at  $(120^\circ, 20^\circ)$ .

- [9] Codina R. On stabilized finite element methods for linear systems of convection–diffusion–reaction equations, *Computer Methods in Applied Mechanics and Engineering* 2000a, 190:2681-2706.
- [10] de Sampaio PAB, Coutinho ALGA. A natural derivation of discontinuity capturing operator for convection-diffusion problems, *Computer Methods in Applied Mechanics and Engineering* 2001, 190:6291-6308.
- [11] Donea J. A Taylor-Galerkin method for convective transport problems, *International Journal for Numerical Methods in Engineering* 1984, 20:101-119.
- [12] J. Donea, A. Huerta, *Finite element method for flow problems*. J. Wiley & Sons, 2003.
- [13] Douglas J, Russell TF. Numerical methods for convection-dominated diffusion problems based on combining the method of characteristics with the finite element or finite difference procedures, *SIAM Journal of Numerical Analysis* 1982, 19:871-885.
- [14] Dutra do Carmo EG, Alvarez GB. A new upwind function in stabilized finite element formulations, using linear and quadratic elements for the scalar convection-diffusion problems, *Computer Methods in Applied Mechanics and Engineering* 2004, 193:2383-2402.
- [15] Felippa C, Oñate E. Nodally exact Ritz discretizations of the 1D diffusion-absorption and

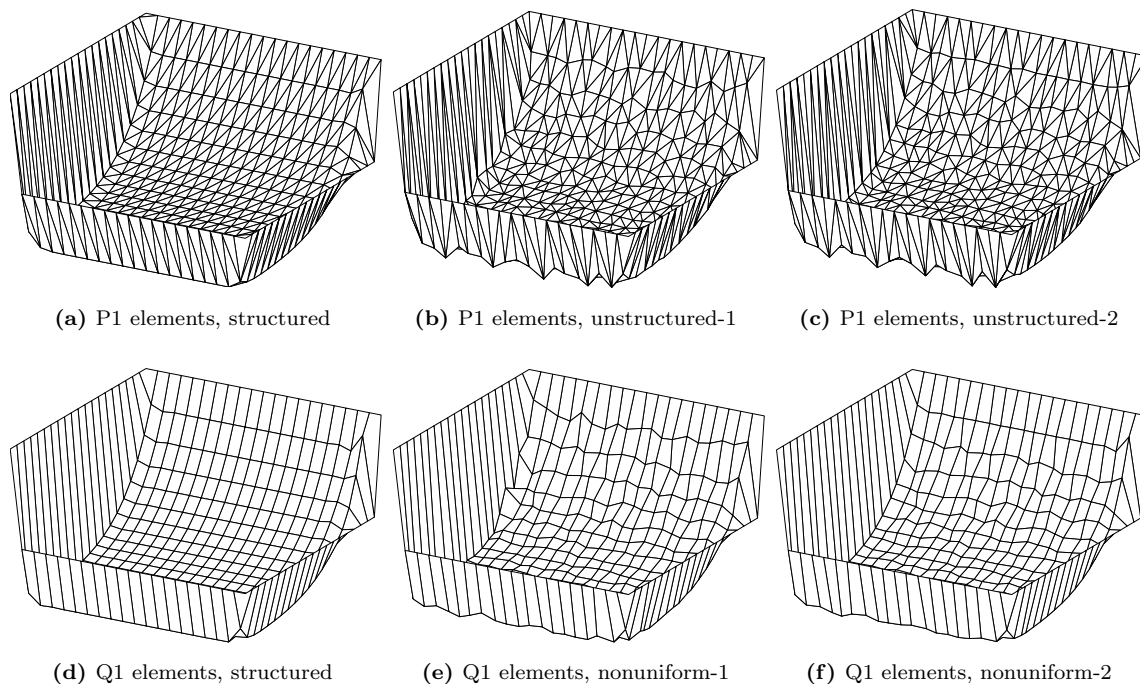

**Figure 7:** The FIC-FEM solution to Example 6.  $\mathbf{v} = [1, 0]^T$ ,  $k_1 = 10^{-8}$ ,  $k_2 = 10^{-8}$ ,  $s = 4.8$ ,  $Q = 0$  and viewed at  $(120^\circ, 20^\circ)$ .

Helmholtz equations by variational FIC and modified equation methods, *Computational Mechanics* 2007, 39(2):91-111.

- [16] Franca LP, Dutra do Carmo EG. The Galerkin gradient least-squares method, *Computer Methods in Applied Mechanics and Engineering* 1989, 74:41-54.
- [17] Franca LP, Farhat C. Bubble functions prompt unusual stabilized finite element methods, *Computer Methods in Applied Mechanics and Engineering* 1995, 123:299-308.
- [18] Franca LP, Valentin F. On an improved unusual stabilized finite element method for the advective-reactive-diffusive equation, *Computer Methods in Applied Mechanics and Engineering* 2001, 190:1785-1800.
- [19] Galeão AC, Dutra do Carmo EG. A consistent approximate upwind Petrov–Galerkin method for the convection-dominated problems. *Computer Methods in Applied Mechanics and Engineering* 1988, 68(1):83-95.
- [20] Harari I, Hughes TJR. Stabilized finite element methods for steady advection-diffusion with production, *Computer Methods in Applied Mechanics and Engineering* 1994, 115:165-191.
- [21] Hauke G, García-Olivares A. Variational subgrid scale formulations for the advection-diffusion–reaction equation, *Computer Methods in Applied Mechanics and Engineering* 2001, 190:6847-6865.

- [22] Hauke G. A simple subgrid scale stabilized method for the advection-diffusion–reaction equation, *Computer Methods in Applied Mechanics and Engineering* 2002, 191:2925-2947.
- [23] Hauke G, Sangalli G, Doweidar MH. Combining adjoint stabilized methods for the advection-diffusion–reaction problem, *Mathematical Models and Methods in Applied Sciences* 2007, 17(2):305-326.
- [24] Hughes TJR, Brooks AN. A theoretical framework for Petrov–Galerkin methods, with discontinuous weighting functions: application to the streamline upwind procedure, in Gallagher RH, Norrie DM, Oden JT, Zienkiewicz OC (eds.), *Finite Elements in Fluids* 1982, IV, Wiley, Chichester.
- [25] Hughes TJR, Mallet M. A new finite element formulations for computational fluid dynamics: III. The generalized streamline operator for multidimensional advective-diffusive systems. *Comput Methods Appl. Mech. Engrg.* 1986a, 58:305–328.
- [26] Hughes TJR, Franca LP, Hulbert GM. A new finite element formulation for computational fluid dynamics: VIII. The Galerkin/least-squares method for advective-diffusive equations, *Computer Methods in Applied Mechanics and Engineering* 1989, 73:173-189.
- [27] Hughes TJR, Feijoo GR, Mazzei L, Quincy JB. The variational multiscale method: a paradigm for computational mechanics, *Computer Methods in Applied Mechanics and Engineering* 1998, 166:3-24.
- [28] Idelsohn SR, Nigro N, Storti M, Buscaglia G. A Petrov–Galerkin formulation for advective-reaction-diffusion problems, *Computer Methods in Applied Mechanics and Engineering* 1996, 136:27-46.
- [29] Idelsohn SR, Heinrich JC, Oñate E. Petrov–Galerkin methods for the transient advective-diffusive equation with sharp gradients, *International Journal for Numerical Methods in Engineering* 1996, 39:1455-1473.
- [30] John V, Knobloch P. On spurious oscillations at layers diminishing (SOLD) methods for convection-diffusion equations: Part I - A review, *Computer Methods in Applied Mechanics and Engineering* 2007, 196:2197–2215.
- [31] Johnson C, Szepessy A, Hansbo P. On the convergence of shock-capturing streamline diffusion finite element methods for hyperbolic conservation laws, *Mathematics of Computation* 1990, 54:107-129.
- [32] Kikuchi F, Ushijima T. Theoretical analysis of some finite element schemes for convective diffusion equations, in: R. Gallagher, D. Norrie, J. Oden, O. C. Zienkiewicz (Eds.), *Finite Elements in Fluids*, Vol. IV, John Wiley and Sons Ltd, Chichester, 1982.

- [33] Knobloch P. Improvements of the Mizukami-Hughes method for convection-diffusion equations, *Computer Methods in Applied Mechanics and Engineering* 2006, 196:579-594.
- [34] Löhner R, Morgan K, Zienkiewicz OC. The solution of non-linear hyperbolic equation systems by the finite element method, *International Journal for Numerical Methods in Fluids* 1984, 4:1043-1063.
- [35] Mizukami A, Hughes TJR. A Petrov-Galerkin finite element method for convection-dominated flows: An accurate upwinding technique for satisfying the maximum principle, *Computer Methods in Applied Mechanics and Engineering* 1985, 50(2):181-193.
- [36] Nadukandi P, Oñate E, García Espinosa J. A high-resolution Petrov-Galerkin method for the 1D convection-diffusion-reaction problem, *Computer Methods in Applied Mechanics and Engineering* 2010, 199(9-12):525-546.
- [37] Nadukandi P, Oñate E, García Espinosa J. A high-resolution Petrov-Galerkin method for the convection-diffusion-reaction problem. Part II. A multidimensional extension, *Computer Methods in Applied Mechanics and Engineering* 2012, 213-216:327-352.
- [38] Oñate E, Idelsohn SR, Zienkiewicz OC, Taylor RL, Sacco C. A stabilized finite point method for analysis of fluid mechanics problems. *Computer Methods in Applied Mechanics and Engineering* 1996, 139:315-346.
- [39] Oñate E. Derivation of stabilized equations for numerical solution of advective-diffusive transport and fluid flow problems, *Computer Methods in Applied Mechanics and Engineering* 1998, 151:233-265.
- [40] Oñate E, Idelsohn SR. A mesh-free finite point method for advective-diffusive transport and fluid flow problems. *Comput. Mech.* 1998, 23:283-292.
- [41] Oñate E, Manzan M. A general procedure for deriving stabilized space-time finite element methods for advective-diffusive problems. *Int. J. Num. Meth. Fluids* 1999, 31:203-221.
- [42] Oñate E, Manzan M. Stabilization techniques for finite element analysis of convection-diffusion problems, in Sundén B, Comini G. (eds.), *Computational Analysis of Convection Heat Transfer* 2000, 71-117, WIT Press, Southampton (UK), 2000.
- [43] Oñate E, Sacco C, Idelsohn SR. A finite point method for incompressible flow problems. *Computing and Visualization in Science* 2000, 2:67-75.
- [44] Oñate E, García J. A finite element method for fluid-structure interaction with surface waves using a finite calculus formulation. *Computer Methods in Applied Mechanics and Engineering* 2001, 191:635-660.

- [45] Oñate E, Perazzo F, Miquel J. A finite point method for elasticity problems. *Computers and Structures* 2001, 79:2151–2163.
- [46] Oñate E, Taylor RL, Zienkiewicz OC, Rojek J. A residual correction method based on finite calculus. *Engineering Computations* 2003, 20(5/6):629–658.
- [47] Oñate E. Possibilities of finite calculus in computational mechanics. *International Journal for Numerical Methods in Engineering* 2004, 60(1), 255–281.
- [48] Oñate E, Idelsohn SR, Del Pin F, Aubry R. The particle finite element method. An overview. *International Journal of Computational Methods* 2004, 1(2):267–307.
- [49] Oñate E, Rojek J, Taylor RL Zienkiewicz OC. Finite calculus formulation for incompressible solids using linear triangles and tetrahedra. *International Journal for Numerical Methods in Engineering* 2004, 59:1473–1500.
- [50] Oñate E, Zarate F, Idelsohn SR. Finite element formulation for the convective-diffusive problems with sharp gradients using finite calculus, *Computer Methods in Applied Mechanics and Engineering* 2006, 195:1793-1825.
- [51] Oñate E, Miquel J, Hauke G. Stabilized formulation for the advection-diffusion-absorption equation using finite calculus and linear finite elements, *Computer Methods in Applied Mechanics and Engineering* 2006, 195(33–36):3926–3946.
- [52] Oñate E, Valls A, García J. FIC/FEM formulation with matrix stabilizing terms for incompressible flows at low and high Reynolds numbers. *Computational Mechanics* 2006, 38(4-5):440–455.
- [53] Oñate E, García J, Idelsohn SR, Del Pin F. FIC formulations for finite element analysis of incompressible flows. Eulerian, ALE and Lagrangian approaches. *Computer Methods in Applied Mechanics and Engineering* 2006, 195(23-24):3001–3037.
- [54] Oñate E, Miquel J, Zarate F. Stabilized solution of the multidimensional advection-diffusion-absorption equation using linear finite elements, *Computers and Fluids* 2007, 36:92–112.
- [55] Oñate E, Valls A, García J. Modeling incompressible flows at low and high Reynolds numbers via a finite calculus-finite element approach. *Journal of Computational Physics* 2007, 224:332–351.
- [56] Oñate E, Idelsohn SR, Celigueta MA, Rossi R. Advances in the particle finite element method for the analysis of fluid-multibody interaction and bed erosion in free surface flows. *Comput. Methods Appl. Mech. Engrg.* 2008, 197(19-20):1777—1800.
- [57] Oñate E, Nadukandi P, Idelsohn S, García J, Felippa C. A family of residual-based stabilized finite element methods for Stokes flows. *Int. J. Num. Meth. in Fluids* 2011, 65 (1-3):106–134.

- [58] Oñate E, Idelsohn SR, Felippa C. Consistent pressure Laplacian stabilization for incompressible continua via higher order finite calculus. *International Journal for Numerical Methods in Engineering* 2011, 87 (1-5):171—195.
- [59] Oñate E, Nadukandi P, Idelsohn S. P1/P0+ elements for incompressible flows with discontinuous material properties. *Computer Methods in Applied Mechanics and Engineering* 2014, 271:185–209
- [60] Oñate E, Miquel J, Nadukandi P. An accurate FIC-FEM formulation for the 1D advection–diffusion–reaction equation. *Comput. Methods Appl. Mech. Engrg.* 2016, 298:373–406.
- [61] J. Principe, R. Codina, [On the stabilization parameter in the subgrid scale approximation of scalar convection–diffusion–reaction equations on distorted meshes](#), *Computer Methods in Applied Mechanics and Engineering* 2010, 199(21-22):1386–1402.
- [62] Tezduyar TE, Park YJ. Discontinuity-capturing finite element formulations for nonlinear convection–diffusion–reaction equations. *Computer Methods in Applied Mechanics and Engineering* 1986; **59**:307–325.
- [63] Yu CC, Heinrich JC. Petrov–Galerkin methods for the time-dependent convective transport equations, *International Journal for Numerical Methods in Engineering* 1986, 23:883-901.
- [64] Zienkiewicz OC, Codina R. A general algorithm for compressible and incompressible flows. Part I: the split, characteristic based scheme, *International Journal for Numerical Methods in Fluids* 1995, 20:869-885.
- [65] Zienkiewicz OC, Taylor RL, Zhu JZ. *The finite element method. The basis.* 6th Ed., Elsevier, 2005.
- [66] Zienkiewicz OC, Taylor RL, Nithiarasu P. *The finite element method for fluid dynamics.* 6th Ed., Elsevier, 2005.